POWER YOUR FUTURE

Cummins Generator LG25C

4B3.9-G12

Prime Power: 25KW/31.25KVA

Standby Power: 27.5KW/34.38KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations Reliable, robust and versatile generator.

Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series

25KVA--2000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG25C
Rated prime power	kva	31.25
Rated standard power	kva	34.38
Rated voltage line to line	V	400/230
Rated current	Α	45
Maximun sound level	dB(@7m)	96

Engine-DCEC Cummins			
Model		4B3.9-G12	
Aspiration	Air natural aspirated		
Fuel system		Weifu A pump	
No. cylinders		4 in line	
Displacement	Liquid	3.9	
Bore*Stroke	mm	102*120	
Compression ratio		18.0:1	
Rated speed	r/min	1500	
Rated net power(with fan)	Kw	27	
Governor type		Electronic speed	
Start Motor	V	24	

Exhause System		
Exhause gas flow	litre/sec	72.5
Exhause gas temp	${\mathbb C}$	340
Max back pressure	kPa	10
Aspiration System		

Max inlet pressure	kPa	3.4
Combustion volume	kPa	1
Air flow	m³/min	34.8

Fuel System		
100% load(Prime power)	L/h	7.4
75% load(Prime power)	L/h	6.1
50% load(Prime power)	L/h	4.5
Fuel tank capacity	L	100

Lubrication System		
Oil capacity	L	10.9
Oil consumption	g/kwh	0.5
Oil pressure	kPa	207-345
(continuous operation)		

Cooling System		
Coolant capacity	L	7.2
Thermostat operation range	$^{\circ}$ C	83-95
Max water temperature	$^{\circ}$ C	110/104

LG25C

Alternator		
Model	LONGKAI	LK184G
	STAMFORD P	144G-SOL2-P1
Phase		3
Voltage	V	400/230
Wiring Type	3 Phas	se 4 wire, Y type
Bearing		1
Power factor		8.0
Frequency	Hz	50
Prime power	KW	25
Exciter Type	Brushles	s, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

Controller-DEEPSEA

Model DSE6120

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options





- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet


Fuan Longkai Power Co., Ltd. | Web: www.longkaipower.com





Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

Unit Dimensions(Basic unit)

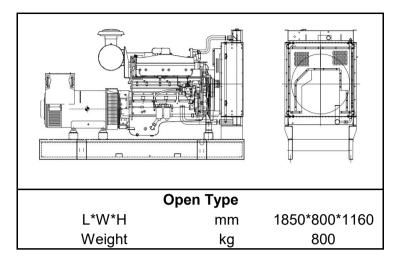

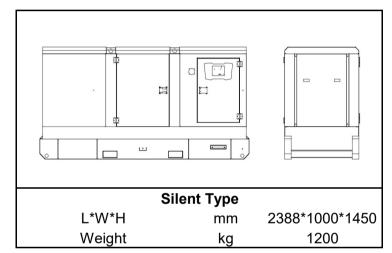

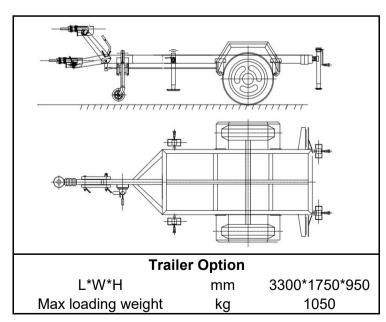

Options

Options		
Battery charge		\circ
Engine heater		\bigcirc
Alternator heater		\bigcirc
PMG		\bigcirc
Water oil separator		\bigcirc
Daily fuel tank		\bigcirc
Remote control panel		\bigcirc
Automatic transfer switch/AT	S	\bigcirc
Switch box		\bigcirc
Standard: ●	Options:o	

Warranty*

Cummins Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

