# POWER YOUR FUTURE

# Cummins Generator LG60C

# 4BTA3.9-G11

Prime Power: 58KW/72.5KVA

Standby Power: 63.8KW/79.75KVA



# GENERATING POWER SOLUTIONS

#### Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

#### **Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

#### Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

#### **Premium resale value**

Designed and built to last.

## **↑** SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



# FUAN LONGKAI POWER CO.,LTD.

#### Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



# **Technical Data**

LG60C

| Model                      |         | LG60C   |
|----------------------------|---------|---------|
| Rated prime power          | kva     | 72.5    |
| Rated standard power       | kva     | 79.75   |
| Rated voltage line to line | V       | 400/230 |
| Rated current              | Α       | 105     |
| Maximun sound level        | dB(@7m) | 96      |

| Engine-DCEC Cummins       |                               |                   |  |
|---------------------------|-------------------------------|-------------------|--|
| Model                     |                               | 4BTA3.9-G11       |  |
| Aspiration                | Pressurized water air cooling |                   |  |
| Fuel system               |                               | PB north oil pump |  |
| No. cylinders             |                               | 4 in line         |  |
| Displacement              | Liquid                        | 3.9               |  |
| Bore*Stroke               | mm                            | 102*120           |  |
| Compression ratio         |                               | 17.3: 1           |  |
| Rated speed               | r/min                         | 1500              |  |
| Rated net power(with fan) | ) Kw                          | 70                |  |
| Governor type             |                               | Electronic speed  |  |
| Start Motor               | V                             | 24                |  |

| Exhause System    |               |     |
|-------------------|---------------|-----|
| Exhause gas flow  | m³/min        | 134 |
| Exhause gas temp  | ${\mathbb C}$ | 548 |
| Max back pressure | kPa           | 10  |

| Aspiration System  |        |    |
|--------------------|--------|----|
| Max inlet pressure | kPa    | /  |
| Combustion volume  | m³/min | 1  |
| Air flow           | m³/min | 70 |

| Fuel System            |     |      |
|------------------------|-----|------|
| 100% load(Prime power) | L/h | 17.4 |
| 75% load(Prime power)  | L/h | 13.2 |
| 50% load(Prime power)  | L/h | 9.1  |
| Fuel tank capacity     | L   | 120  |

| <b>Lubrication System</b> |       |          |
|---------------------------|-------|----------|
| Oil capacity              | L     | 10.9     |
| Oil consumption           | g/kwh | 0.5      |
| Oil pressure              | kPa   | 207-3445 |
| (continuous operation)    |       |          |

| Cooling System             |                        |         |
|----------------------------|------------------------|---------|
| Coolant capacity           | L                      | 8.3     |
| Thermostat operation range | $^{\circ}$ C           | 83-95   |
| Max water temperature      | $^{\circ}\!\mathbb{C}$ | 104/100 |

| Alternator         |          |                    |
|--------------------|----------|--------------------|
| Model              | LONGKAI  | LK224G             |
|                    | STAMFORD | UCI224G            |
| Phase              |          | 3                  |
| Voltage            | V        | 400/230            |
| Wiring Type        | 3 Phas   | se 4 wire, Y type  |
| Bearing            |          | 1                  |
| Power factor       |          | 8.0                |
| Frequency          | Hz       | 50                 |
| Prime power        | KW       | 68                 |
| Exciter Type       | Brushles | s, self-excitation |
| Voltage regulation | %        | ±0.5               |
| Protection Grade   |          | IP 23              |
| Insulation grade   |          | H/H                |
| Altitude           | m        | ≤1000              |

## **Controller-DEEPSEA**

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



## **Control Module Options**






- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet




## Standard Features

# Unit Dimensions(Basic unit)

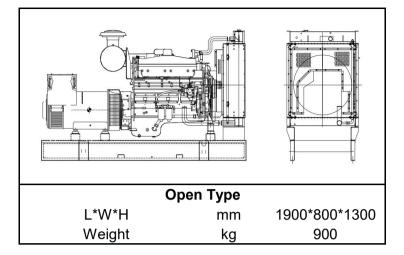

#### **Options** Battery charge $\bigcirc$ Engine heater $\bigcirc$ Alternator heater 0 **PMG** $\bigcirc$ Water oil separator $\bigcirc$ Daily fuel tank $\bigcirc$ Remote control panel $\bigcirc$ Automatic transfer switch/ATS $\bigcirc$ Switch box Standard: • Options:0

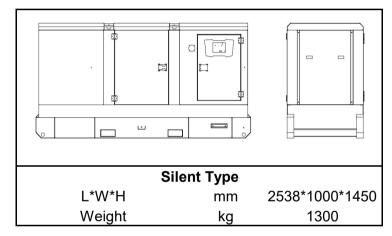

# Warranty\*

# **Cummins Engine**

12 months from date of purchase and 1000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

