## POWER YOUR FUTURE

# Cummins Generator LG75C

## 4BTA3.9-G13

Prime Power: 75KW/93.75KVA

Standby Power: 82.5KW/103.13KVA



## GENERATING POWER SOLUTIONS

## Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

#### **Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

#### Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

#### **Premium resale value**

Designed and built to last.

## **↑** SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



## FUAN LONGKAI POWER CO.,LTD.

#### **Headquarters:**

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



## **Technical Data**

Maximun sound level

Model		LG75C
Rated prime power	kva	93.75
Rated standard power	kva	103.13
Rated voltage line to line	V	400/230
Rated current	Α	135

dB(@7m)

96

<b>Engine-DCEC Cummins</b>			
Model		4BTA3.9-G13	
Aspiration	charge inter-cooling		
Fuel system		WeiFu WB pump	
No. cylinders		4 in line	
Displacement	Liquid	3.9	
Bore*Stroke	mm	102*120	
Compression ratio		18.0: 1	
Rated speed	r/min	1500	
Rated net power(with fan)	Kw	87	
Governor type		Electronic speed	
Start Motor	V	24	

<b>Exhause System</b>		
Exhause gas flow	m³/min	167
Exhause gas temp	${}^{\mathbb{C}}$	404
Max back pressure	kPa	10

Aspiration System		
Max inlet pressure	kPa	
Combustion volume	m³/min	
Air flow	m³/min	95

Fuel System		
100% load(Prime power)	L/h	18.8
75% load(Prime power)	L/h	14.1
50% load(Prime power)	L/h	10.1
Fuel tank capacity	L	120

Lubrication System		
Oil capacity	L	10.9
Oil consumption	g/kwh	0.5
Oil pressure	kPa	207-345
(continuous operation)		

Cooling System		
Coolant capacity	L	7.2
Thermostat operation range	$^{\circ}$ C	83-95
Max water temperature	$^{\circ}\!\mathbb{C}$	110/104

Alternator		
Model	LONGKAI	LK274C
	STAMFORD	UCI274C
Phase		3
Voltage	V	400/230
Wiring Type	3 Phas	se 4 wire, Y type
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	80
Exciter Type	Brushles	s, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG75C

## **Controller-DEEPSEA**

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



#### **Control Module Options**






- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet




#### **Standard Features**

## Unit Dimensions(Basic unit)

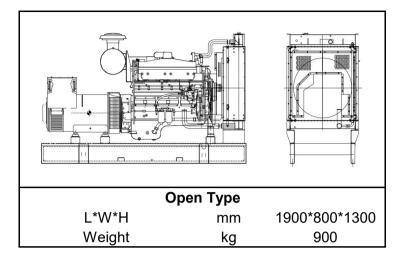

#### **Options** Battery charge $\bigcirc$ Engine heater $\bigcirc$ Alternator heater 0 **PMG** $\bigcirc$ Water oil separator $\bigcirc$ Daily fuel tank $\bigcirc$ Remote control panel $\bigcirc$ Automatic transfer switch/ATS $\bigcirc$ Switch box Standard: • Options:0

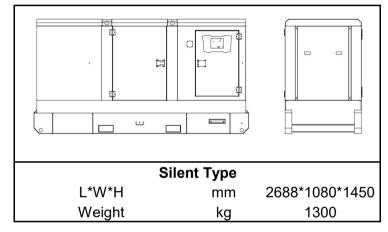

## Warranty\*

## **Cummins Engine**

12 months from date of purchase and 1000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

